



Yuasa Fiche de données techniques

Yuasa YBX5020 - Batteries SMF YBX5000 Silver Haute Performance

Performance

Tension	12V
Capacité (20 heures)	110Ah
Performances en démarrage à froid (EN1)	900A

Dimensions

Longueur	393mm
Largeur	175mm
Hauteur	190mm

Poids & Mesures

Poids moyen avec acide	26.7kg
Poids sans acide	-
Volume d'acide	-



Caractéristiques du bac

Type de boîtier	L6 DIN
Système de fixation	B3
Indicateur de l'état de charge	✓
Poignées	✓
Ventilation latérale	✓
Type de couvercle	Double (anti-écoulement et sans entretien)

Technologie

Dispositif pare-flammes	✓
Technologie	Ca/Ca
Séparateur	PE
Test de retournement VDA	✓
Taux de charge recommandé	6A



Type de bornes

Schéma de montage des éléments

Système de fixation de la batterie

T1

Standard DIN Post

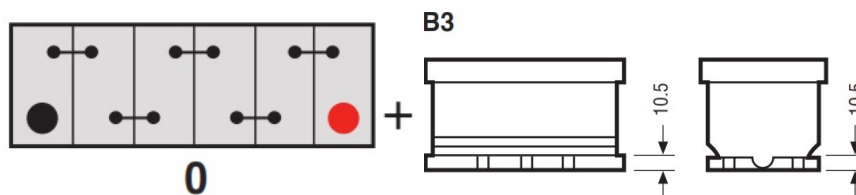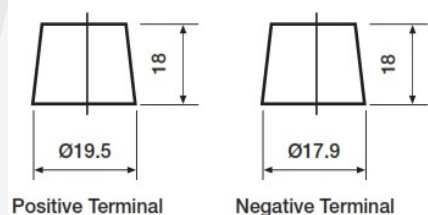

Date de publication: 27/08/2018 - E&OE



Yuasa Technical Data Sheet

Yuasa YBX5020 - YBX5000 Silver High Performance SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	110Ah
Cold Cranking Amps (EN1)	900A

Dimensions

Length	393mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	26.7kg
Dry Weight	-
Acid Volume	-



Container Features

Case Type	L6 DIN
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Semi-Traction Features	-
Lid Type	SMF Double Lid

Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	6A


Terminal Type

Cell Assembly Layout

Battery Hold-down


T1

Standard DIN Post

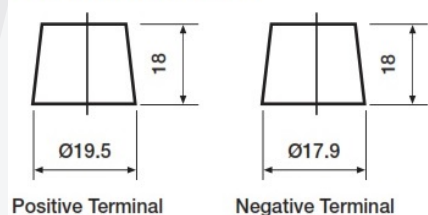

Positive Terminal

Negative Terminal

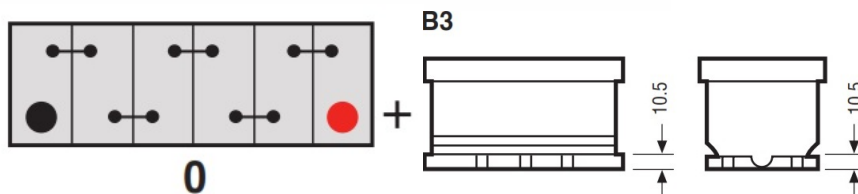

Data Sheet generated on 27/08/2018 - E&OE