



Yuasa Fiche de données techniques

Yuasa YBX3053 - Batteries SME YBX3000

Performance

Tension	12V
Capacité (20 heures)	45Ah
Performances en démarrage à froid (EN1)	400A

Dimensions

Longueur	238mm
Largeur	129mm
Hauteur	225mm

Poids & Mesures

Poids moyen avec acide	12.4kg
Poids sans acide	-
Volume d'acide	-



Caractéristiques du bac

Type de boîtier	JIS B24
Système de fixation	N
Indicateur de l'état de charge	✓
Poignées	✓
Ventilation latérale	✓
Type de couvercle	Double (anti-écoulement et sans entretien)


Technologie

Dispositif pare-flammes	✓
Technologie	Ca/Ca
Séparateur	PE
Test de retournement VDA	✓
Taux de charge recommandé	3A

Type de bornes

T1/T3

Standard DIN Post



Remove T1 adapter for T3





Schéma de montage des éléments



Date de publication: 17/09/2018 - E&OE

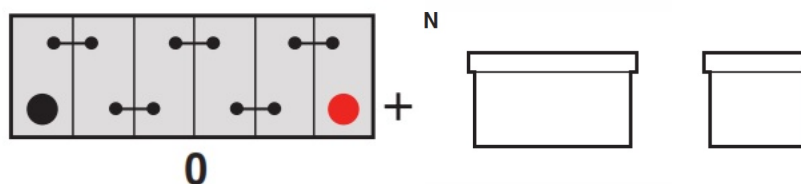

Yuasa Technical Data Sheet

Yuasa YBX3053 - YBX3000 SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	45Ah
Cold Cranking Amps (EN1)	400A

Dimensions

Length	238mm
Width	129mm
Height	225mm

Weights & Measures

Mean Weight with Acid	12.4kg
Dry Weight	-
Acid Volume	-

Container Features

Case Type	JIS B24
Hold Down	N
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Semi-Traction Features	-
Lid Type	SMF Double Lid




Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	3A


Terminal Type

T1/T3


Standard DIN Post



Remove T1 adapter for T3



Cell Assembly Layout

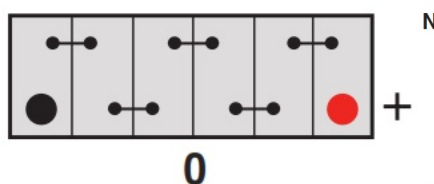

Battery Hold-down



Data Sheet generated on 17/09/2018 – E&OE