# **INCOMPARABLE DEEP CYCLE AGM BATTERY**


LDC6-224-GC2 (6V224Ah)








# **CHARACTERISTICS**

Item		Specifications
Voltage		6V
Dimension	Length	260mm (10.2inches)
	Width	180mm (7.09inches)
	Container Height	247mm (9.72inches)
	Total Height	253mm (9.96inches)
Approx Weight		30.5kg (67.2lbs)
Terminal		T11(M8)
Container Material		ABS
Reserve Capacity	25A	490min
	56A	188min
	75A	135min
Capacity	20HR	224Ah
	5HR	192Ah
Operating Temp. Range	Discharge	-20~55°C (-4~131°F)
	Charge	0~40°C (32~104°F)
	Storage	-15~40°C (5~104°F)









Note: Terminal Torque Values in-lb(Nm):97.35-130.0(11.0-14.7)

# **APPLICATIONS**

- · Electric vehicle
- Golf cart
- Sightseeing
- · Cleaning equipment
- AWP
- Mobility

















# INCOMPARABLE DEEP CYCLE AGM BATTERY

LDC6-224-GC2 (6V224Ah)



## **GENERAL FEATURES**

### Stable initial capacity

- · PAM/NAM amount optimization
- · 4BS crystal paste mixing & curing technology
- · Double layer separator technology
- · Improved design electrolyte S.G.

#### Less water loss

- PAM/NAM amount optimization
- · New PAM/NAM recipe introduced
- · Rare earth alloy

#### Solve NAM sulphation

- · Carbon boost technology
- · Pre-sulfate technology

## Improved PSoC cycling

- · Carbon boost technology
- · Mix carbon boost technology
- Targeting for higher level through carbon technology

#### Delay PAM softening and shedding


- · Plate assembly pressure re-engineering
- · 4BS crystal paste mixing & curing technology
- · Higher paste density


#### Optimize electrolyte stratification


· Introduce AGM-GEL technology


## Excellent deep cycle performance

- · Plate assembly pressure re-engineering
- · New PAM/NAM recipe introduced
- · Gel electrolyte technology
- · Rare earth alloy
- · Double layer separator technology
- · Lower acid filling temperature

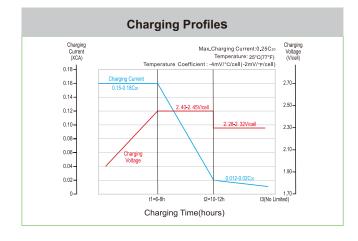

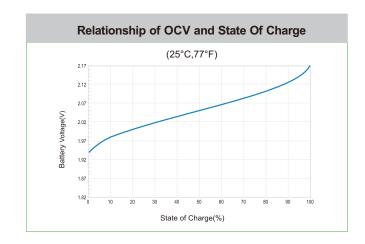

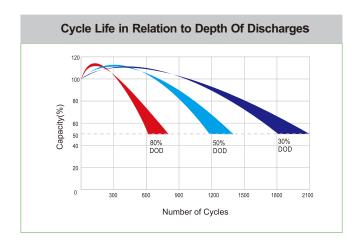

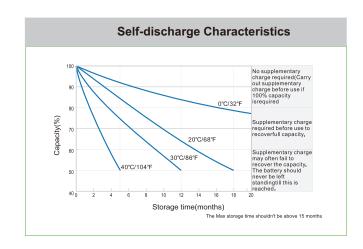

Leoch International Technology Ltd.

mww.leoch.com

Leoch Batteries Pte Ltd

mww.leoch.sg

Leoch Battery Corporation

www.leochamericas.com

Leoch Europe S.A.

www.leoch.eu

Data above is recommended and the picture is only for battery effect display, Leoch reserve the final right of explanation. © LEOCH. All rights reserved. Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted. Subject to revisions without prior notice. E&OE.