



INCOMPARABLE DEEP CYCLE AGM BATTERY

LDC6-400D (6V400Ah)



CHARACTERISTICS

Item	Specifications
Voltage	6V
Dimension	Length: 295mm (11.6inches) Width: 180mm (7.09inches) Container Height: 406mm (16.0inches) Total Height: 429mm (16.9inches)
Approx Weight	54.2kg (119.5lbs)
Terminal	MT(M8)
Container Material	ABS
Reserve Capacity	25A: 925min 75A: 265min
Capacity	20HR: 400Ah 5HR: 342Ah
Discharge	-20~55°C (-4~131°F)
Operating Temp. Range	Charge: 0~40°C (32~104°F) Storage: -15~40°C (5~104°F)

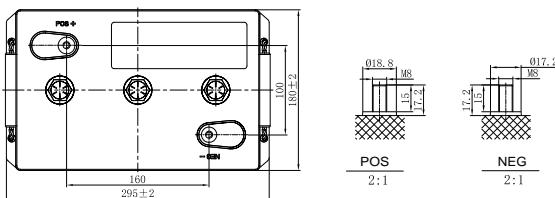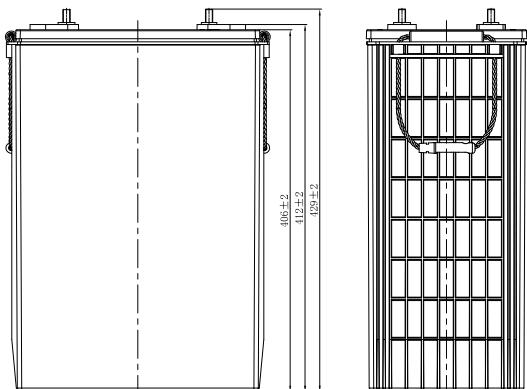

APPLICATIONS

- Electric vehicle
- Golf cart
- Sightseeing
- Cleaning equipment
- AWP
- Mobility



carbon



AGM-GEL

Note: Terminal Torque Values in-lb(Nm):97.35-130.0(11.0-14.7)



INCOMPARABLE DEEP CYCLE AGM BATTERY

LDC6-400D (6V400Ah)



GENERAL FEATURES

Stable initial capacity

- PAM/NAM amount optimization
- 4BS crystal paste mixing & curing technology
- Double layer separator technology
- Improved design electrolyte S.G.

Less water loss

- PAM/NAM amount optimization
- New PAM/NAM recipe introduced
- Rare earth alloy

Solve NAM sulphation

- Carbon boost technology
- Pre-sulfate technology

Improved PSOC cycling

- Carbon boost technology
- Mix carbon boost technology
- Targeting for higher level through carbon technology

Delay PAM softening and shedding





- Plate assembly pressure re-engineering
- 4BS crystal paste mixing & curing technology
- Higher paste density

Optimize electrolyte stratification

- Introduce AGM-GEL technology

Excellent deep cycle performance

- Plate assembly pressure re-engineering
- New PAM/NAM recipe introduced
- Gel electrolyte technology
- Rare earth alloy
- Double layer separator technology
- Lower acid filling temperature

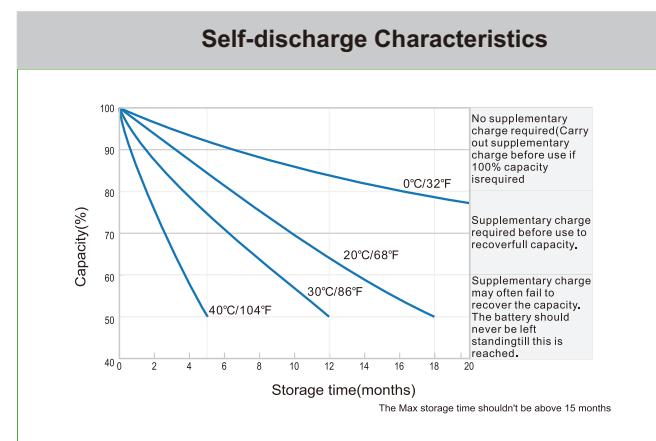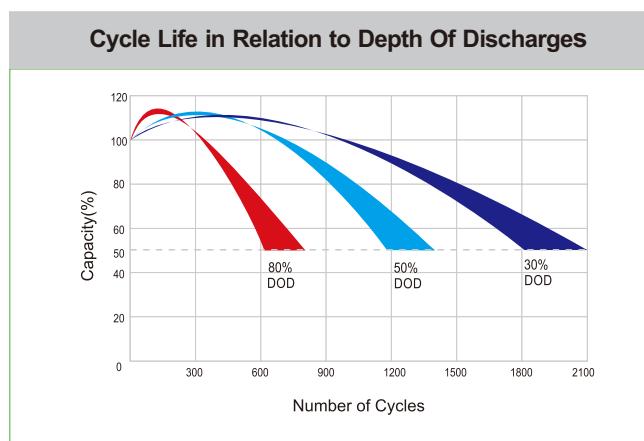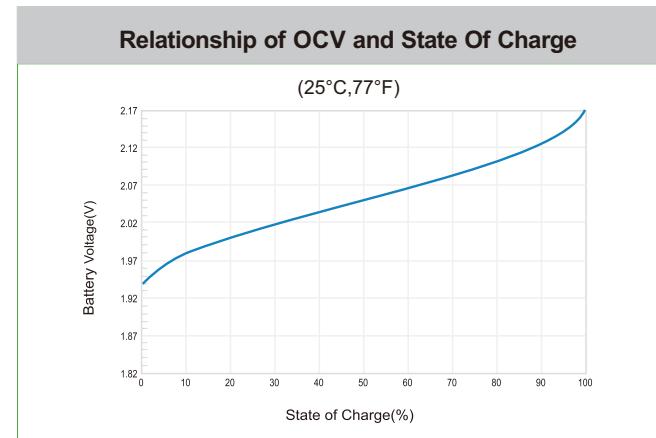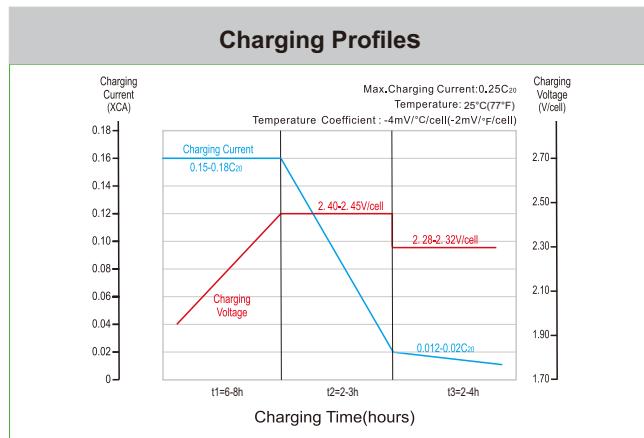

Leoch International Technology Ltd.

www.leoch.com

Leoch Batteries Pte Ltd

www.leoch.sg

Leoch Battery Corporation

www.leochamericas.com

Leoch Europe S.A.

www.leoch.eu