


INCOMPARABLE DEEP CYCLE AGM BATTERY

LDC12-90C (12V90Ah)





CHARACTERISTICS

Item	Specifications
Voltage	12V
Dimension	Length: 260mm (10.2inches) Width: 168mm (6.61inches) Container Height: 208mm (8.19inches) Total Height: 214mm (8.43inches)
Approx Weight	23.3kg (51.4lbs)
Terminal	T6(M6)
Container Material	ABS
Reserve Capacity	25A: 160min 56A: 53min
Capacity	20HR: 90Ah 5HR: 77Ah
Discharge	-20~55°C (-4~131°F)
Operating Temp. Range	Charge: 0~40°C (32~104°F) Storage: -15~40°C (5~104°F)

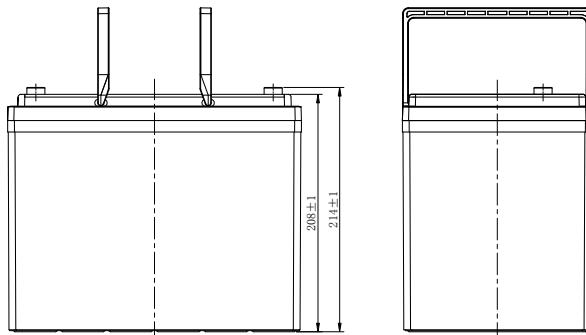


APPLICATIONS

- Electric vehicle
- Golf cart
- Sightseeing
- Cleaning equipment
- AWP
- Mobility

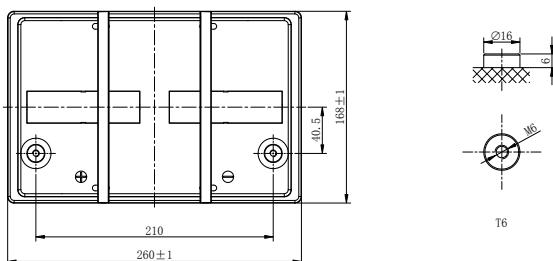

Note: Terminal Torque Values in-lb(Nm):34.52-47.79(3.9-5.4)



INCOMPARABLE DEEP CYCLE AGM BATTERY

LDC12-90C (12V90Ah)

GENERAL FEATURES

Stable initial capacity

- PAM/NAM amount optimization
- 4BS crystal paste mixing & curing technology
- Double layer separator technology
- Improved design electrolyte S.G.

Less water loss

- PAM/NAM amount optimization
- New PAM/NAM recipe introduced
- Rare earth alloy

Solve NAM sulphation

- Carbon boost technology
- Pre-sulfate technology

Improved PSoC cycling

- Carbon boost technology
- Mix carbon boost technology
- Targeting for higher level through carbon technology

Delay PAM softening and shedding





- Plate assembly pressure re-engineering
- 4BS crystal paste mixing & curing technology
- Higher paste density

Optimize electrolyte stratification

- Introduce AGM-GEL technology

Excellent deep cycle performance

- Plate assembly pressure re-engineering
- New PAM/NAM recipe introduced
- Gel electrolyte technology
- Rare earth alloy
- Double layer separator technology
- Lower acid filling temperature

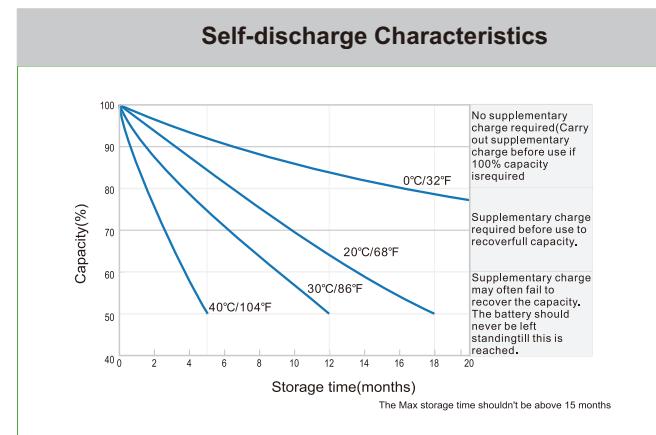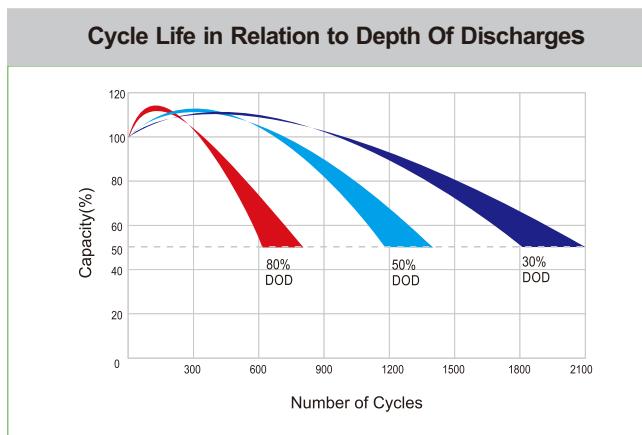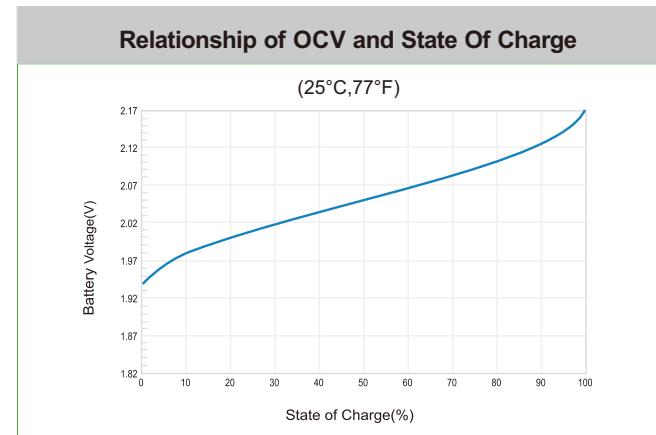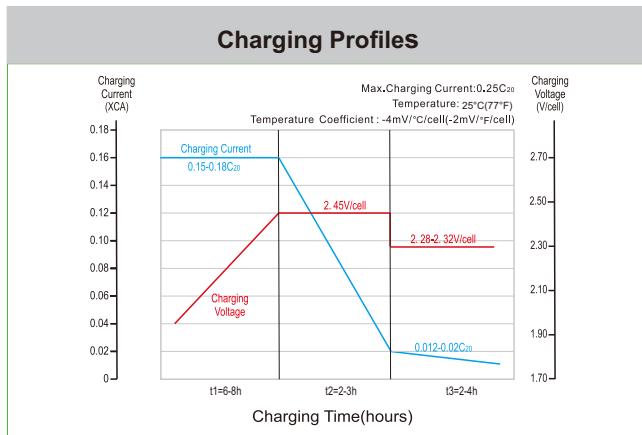

Leoch International Technology Ltd.

 www.leoch.com

Leoch Batteries Pte Ltd

 www.leoch.sg

Leoch Battery Corporation

 www.leochamericas.com

Leoch Europe S.A.

 www.leoch.eu