



Yuasa Fiche de données techniques

Yuasa YBX3075 - Batteries SME YBX3000

Performance

Tension	12V
Capacité (20 heures)	60Ah
Performances en démarrage à froid (EN1)	550A

Dimensions

Longueur	243mm
Largeur	175mm
Hauteur	175mm

Poids & Mesures

Poids moyen avec acide	13.9kg
Poids sans acide	-
Volume d'acide	-



Caractéristiques du bac

Type de boîtier	LB2 DIN
Système de fixation	B3/B4
Indicateur de l'état de charge	✓
Poignées	✓
Ventilation latérale	✓
Type de couvercle	Double (anti-écoulement et sans entretien)

Technologie

Dispositif pare-flammes	✓
Technologie	Ca/Ca
Séparateur	PE
Test de retournement VDA	✓
Taux de charge recommandé	4A



Type de bornes

Schéma de montage des éléments


Système de fixation de la batterie

T1

Standard DIN Post

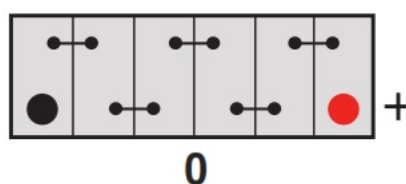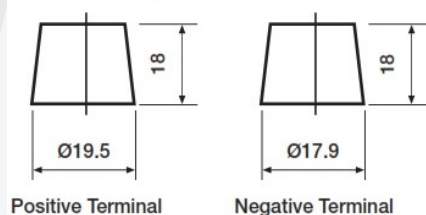

B3/B4 (B3 with Hold-Down adaptor)

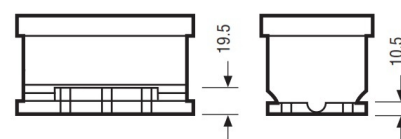

Date de publication: 06/08/2018 - E&OE



Yuasa Technical Data Sheet

Yuasa YBX3075 - YBX3000 SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	60Ah
Cold Cranking Amps (EN1)	550A

Dimensions

Length	243mm
Width	175mm
Height	175mm

Weights & Measures

Mean Weight with Acid	13.9kg
Dry Weight	-
Acid Volume	-

Container Features

Case Type	LB2 DIN
Hold Down	B3/B4
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Semi-Traction Features	-
Lid Type	SMF Double Lid




Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	4A


Terminal Type

T1

Standard DIN Post

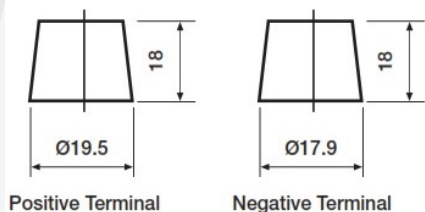


Cell Assembly Layout

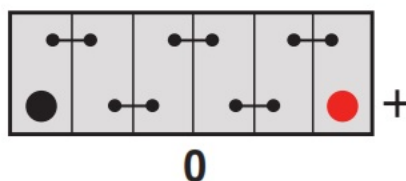

Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

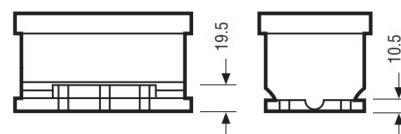

Data Sheet generated on 06/08/2018 – E&OE