



Yuasa Fiche de données techniques

Yuasa 663SHD -

Performance

Tension	12V
Capacité (20 heures)	115Ah
Performances en démarrage à froid (EN1)	800A

Dimensions

Longueur	345mm
Largeur	172mm
Hauteur	232mm

Poids & Mesures

Poids moyen avec acide	25kg
Poids sans acide	-
Volume d'acide	4.8 Litres



Caractéristiques du bac

Type de boîtier	Euro Compact Low D2
Système de fixation	N
Poignées	✓
Type de couvercle	Couvercle plat

Technologie

Dispositif pare-flammes	✓
Technologie	Ca/Ca
Séparateur	PE
Taux de charge recommandé	6A



Type de bornes

Schéma de montage des éléments

Système de fixation de la batterie

T1

Standard DIN Post

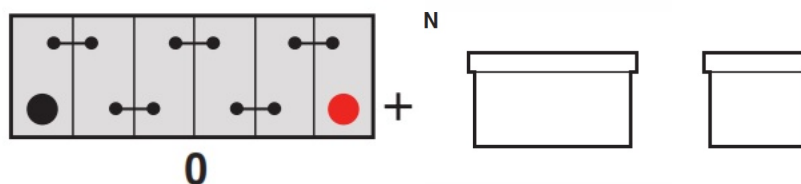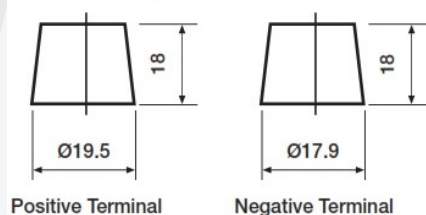

Date de publication: 06/08/2018 - E&OE



Yuasa Technical Data Sheet

Yuasa 663SHD - Cargo Super Heavy Duty Batteries (SHD)

Performance

Voltage	12V
Capacity (20-hour)	115Ah
Cold Cranking Amps (EN1)	800A

Dimensions

Length	345mm
Width	172mm
Height	232mm

Weights & Measures

Mean Weight with Acid	25kg
Dry Weight	-
Acid Volume	4.8 litres



Container Features

Case Type	Euro Compact Low D2
Hold Down	N
State of Charge Indicator	-
Handles	✓
End Venting	-
Semi-Traction Features	-
Lid Type	Flat Lid

Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	-
Recommended Charge Rate	6A



Terminal Type

Cell Assembly Layout

Battery Hold-down

T1

Standard DIN Post

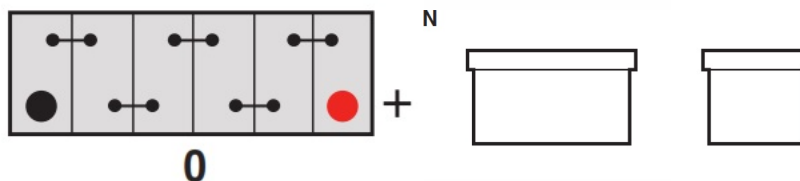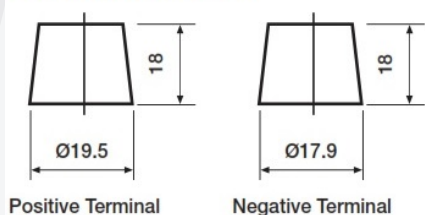

Data Sheet generated on 06/08/2018 – E&OE